Scoreboard vs. Tomasulo, the score

	Scoreboard	Tomasulo
issue	when FU free	when RS free
read operands	from reg file	from reg file, CDB
write operands	to reg file	to CDB
structural hazards	functional units	reservation stations
WAW, WAR hazards	problem	no problem
register renaming	no	yes
instructions completing	no limit	1 per cycle (per CDB)
instructions beginning exec	1 (per set of read ports)	no limit

Branch Prediction

or

sometimes you just have to guess

Importance of Branch Prediction

- DLX/MIPS R2000 -- branch hazard of 1 cycle, 1 instruction issued per cycle
  - delayed branch
- next generation -- 1-2 cycle hazard, 1-2 instructions issued per cycle
  - cost of branch misprediction goes up
- Pentium Pro -- 12+ cycle misprediction penalty, 3 instructions issued per cycle
  - HUGE penalty for mispredicting a branch

Branch Prediction

- Easiest (*static prediction*)
  - always not taken, always taken
  - forward not taken, backward always taken
  - compiler predicted (branch likely, branch not likely)
- Next easiest
  - remember last taken/not taken per branch (1 bit)
  - per branch approximated
    - per I cache line
    - use part of address
  - what happens on a loop?

2-bit branch prediction

- has 4 states instead of 2, allowing for more information about tendencies.

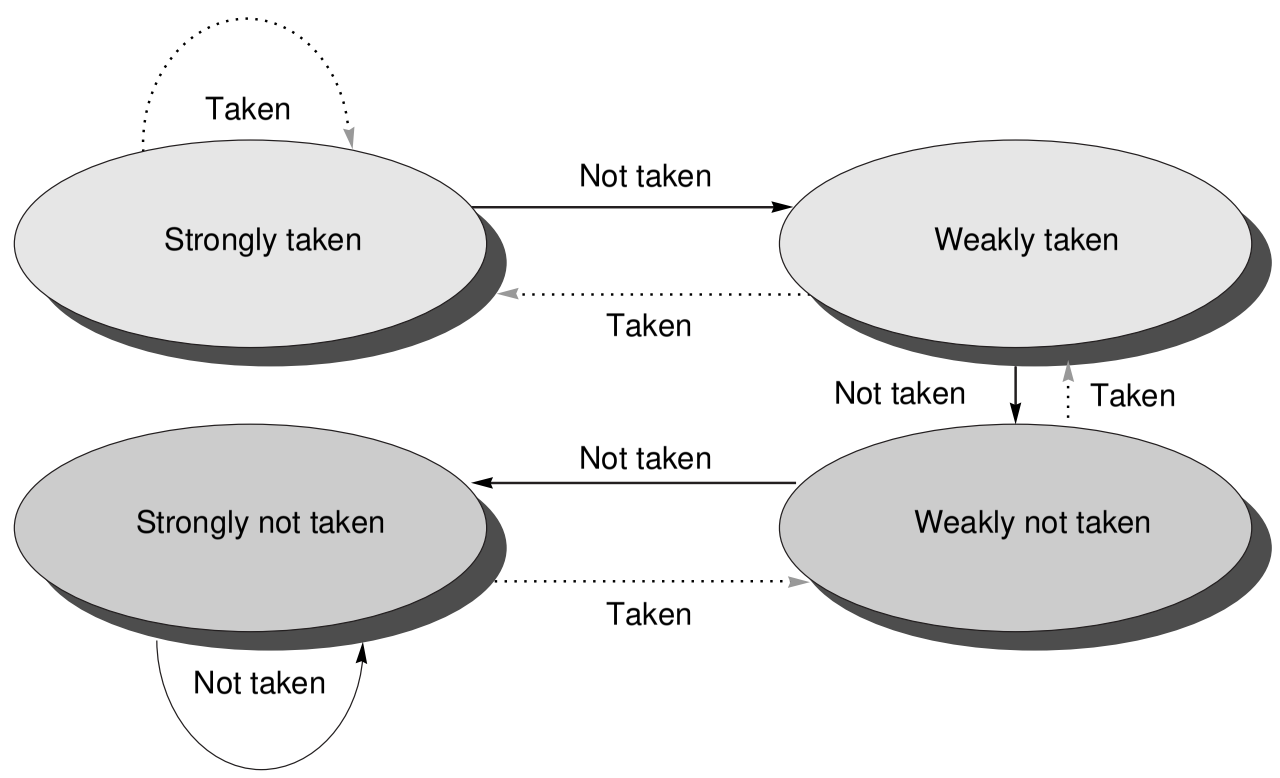

- Loops?

Two different 2-bit schemes

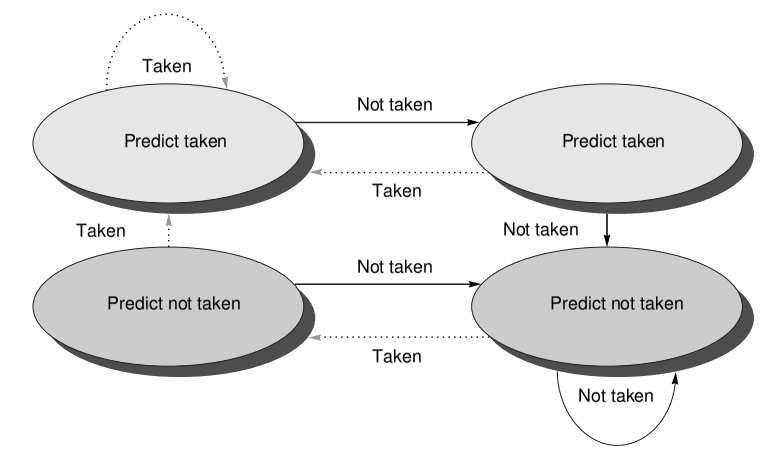

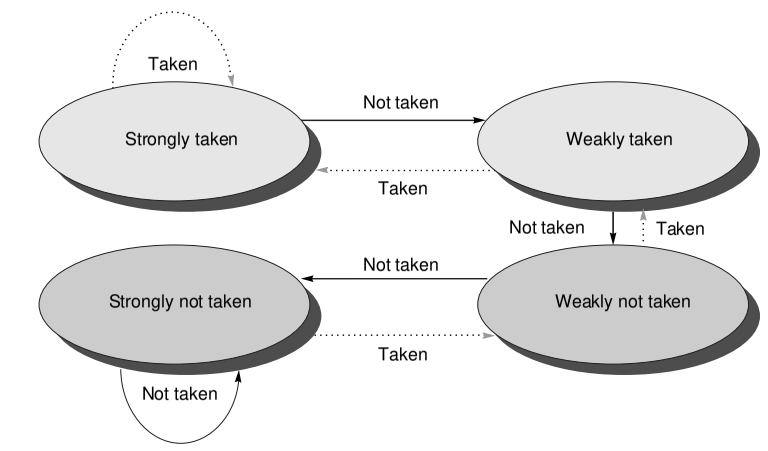

Branch History Table

- has limited size
- 2 bits by N (e.g. 4K)
- uses low bits of branch address to choose entry

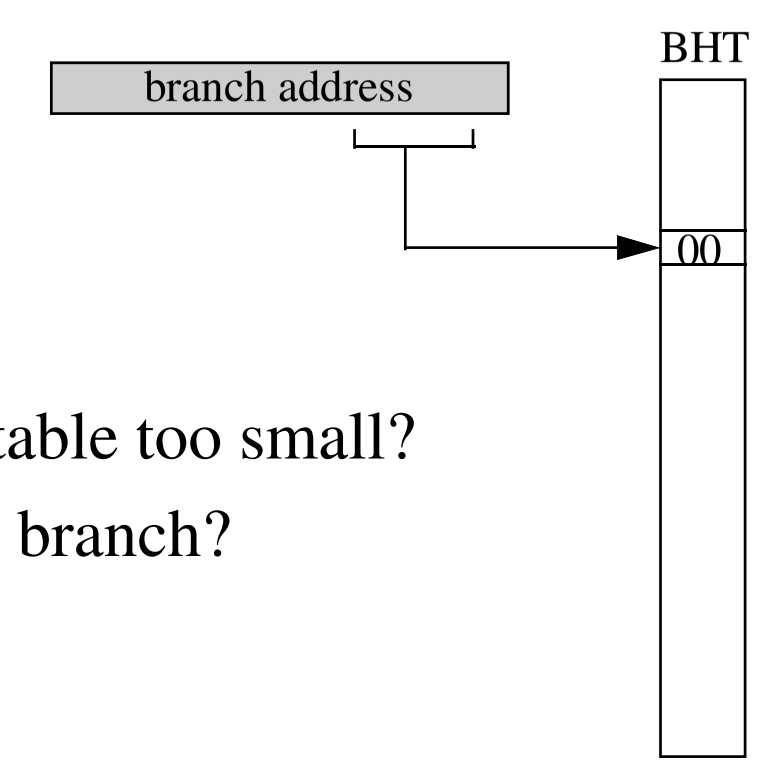

- what happens when table too small?
- what about even/odd branch?

2-bit prediction accuracy

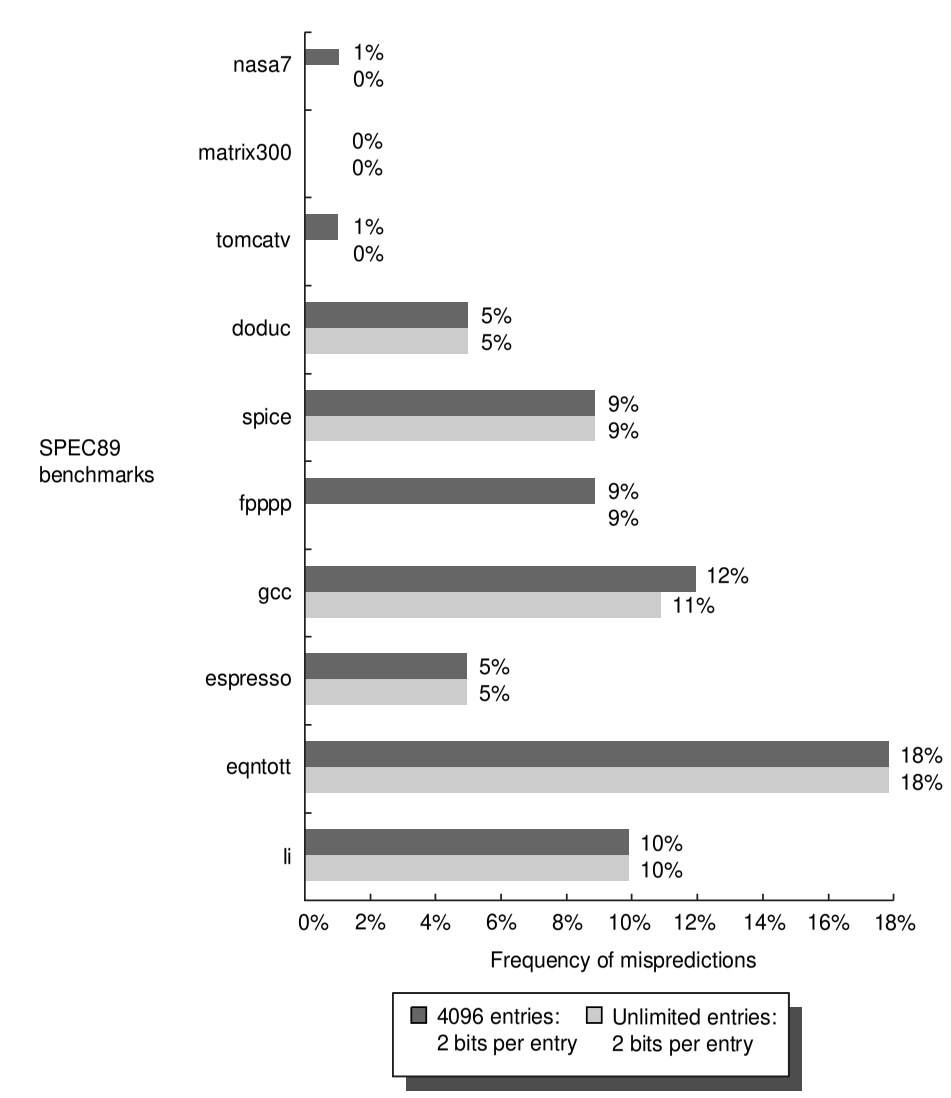

Is this good enough?

Can We Do Better?

- Can we get more information dynamically than just the history of this branch?
- We can look at patterns (*2-level predictor*).
  - last eight branches 00100100, then it is a good guess that the next one is "1" (taken)

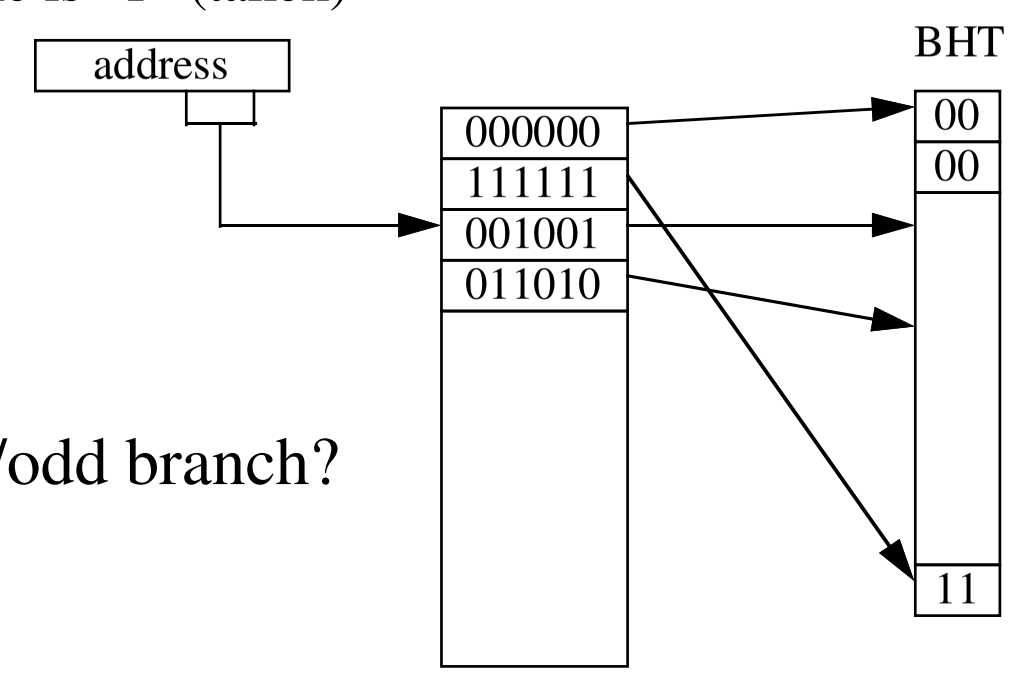

- even/odd branch?

Can We Do Better?

- *Correlating Branch Predictors* also look at other branches for clues

  if (i == 0)
  ...
  if (i > 7)
  ...
- Typically use two indexes
  - Global history register --> history of last m branches (e.g., 0100011)
  - branch address

Correlating Branch Predictors

- The *global history register* is a shift register that records the last *n* branches encountered by the processor.

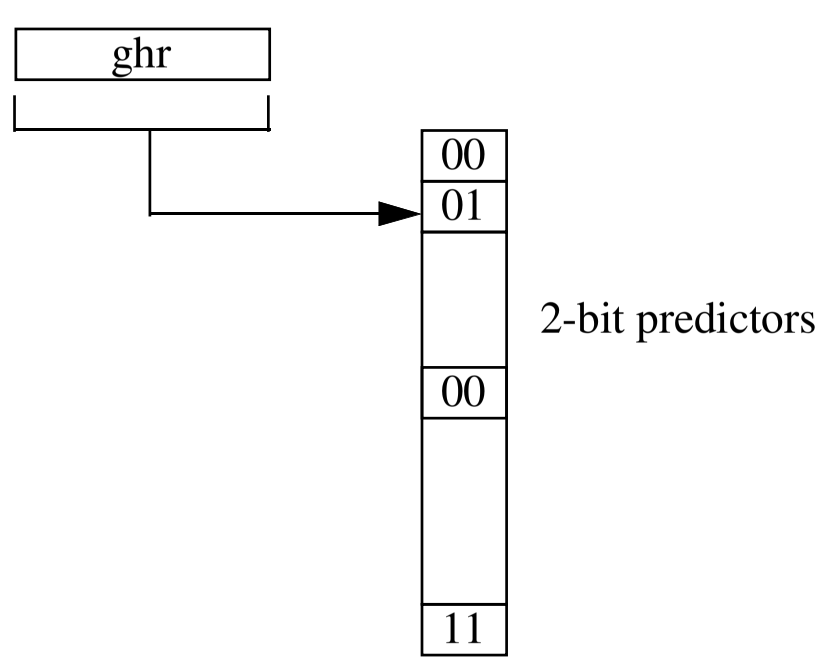

Two-level branch predictors

- Can use both the PC address and the GHR

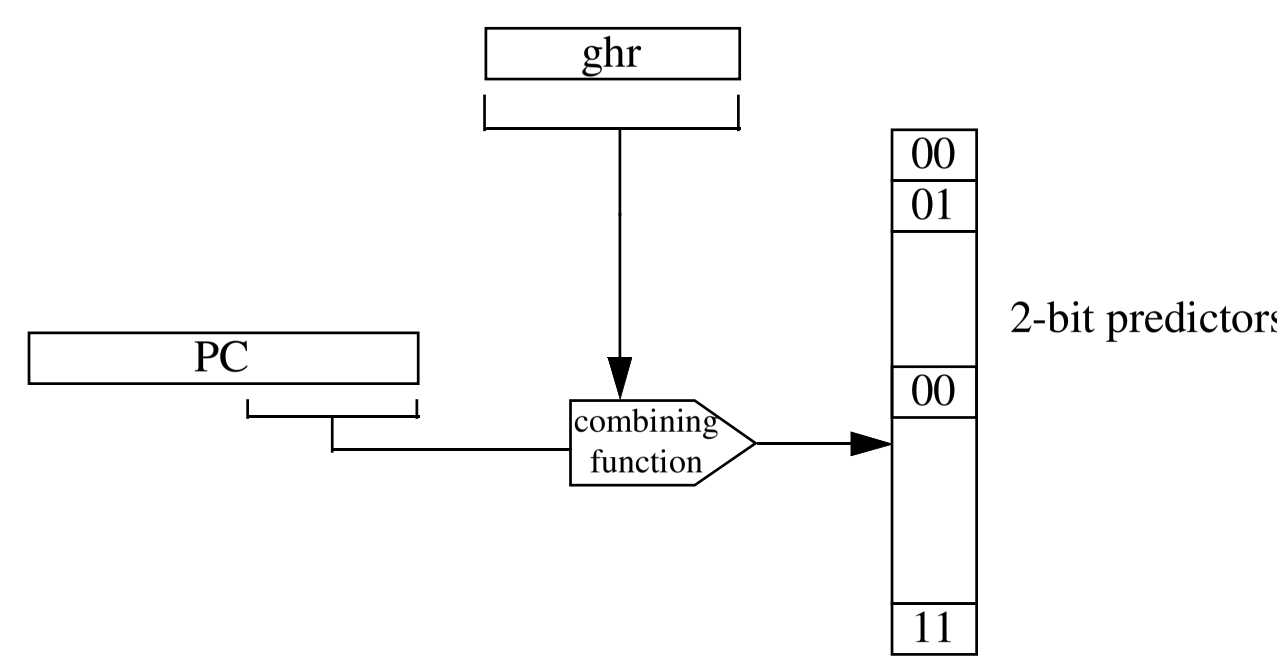

2-level branch prediction

- If we concatenate the GHR and the PC, we get...



- This is a (2,2) scheme (2 bits of global history, 2-bit predictors)
- Could also XOR GHR and PC (gshare).

Performance of 2-level Correlating Branch Prediction

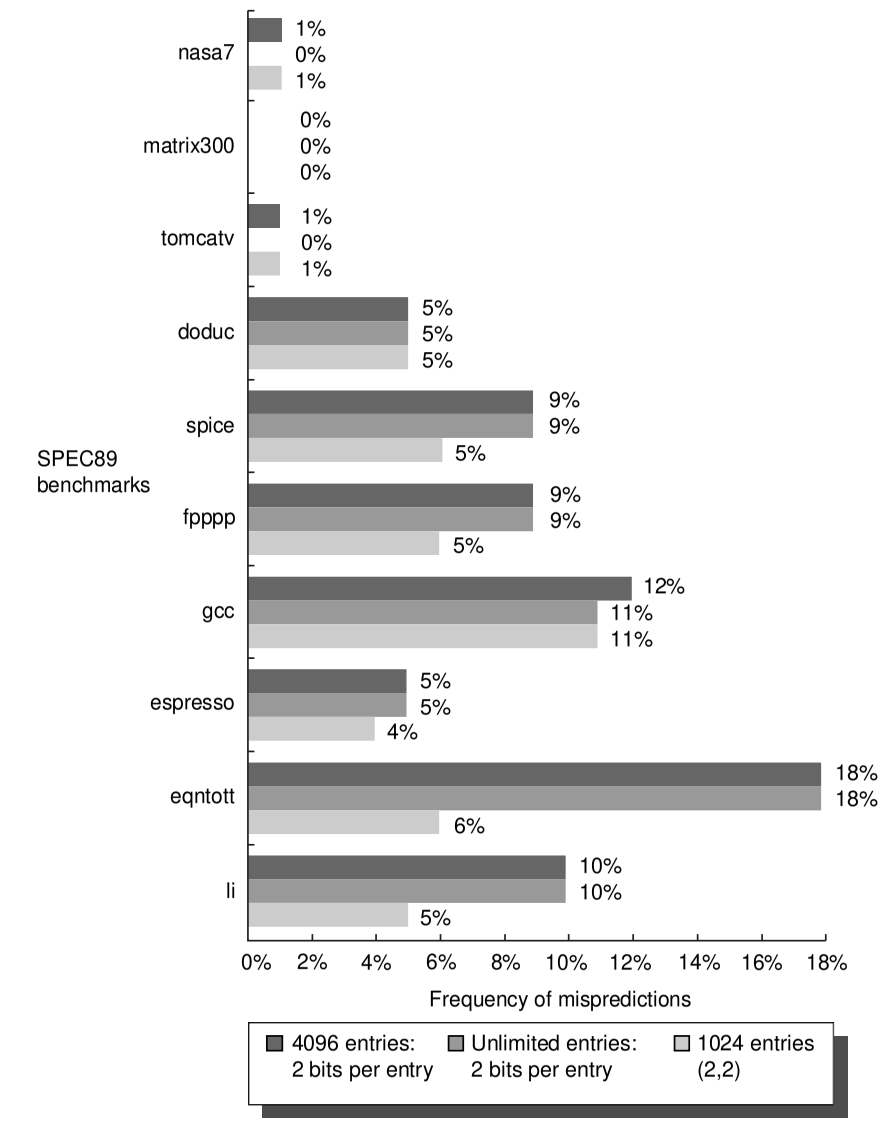

Are we happy yet????

- *Combining branch predictors* use multiple schemes and a voter to decide which one typically does better for *that* branch.

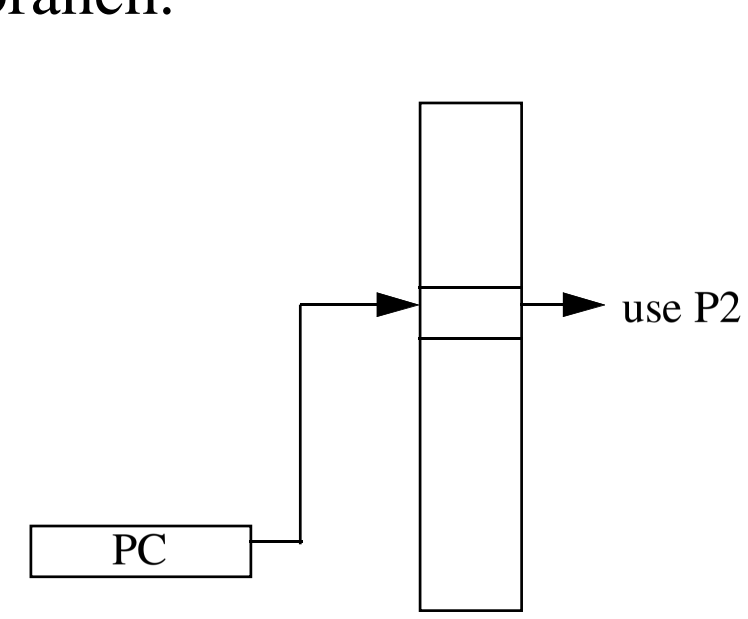

But...

- When do we need to do the prediction to avoid any control hazards on a correct prediction?
- A taken/not taken prediction only helps us if....?

Branch Target Buffers

- predict the location of branches in the instruction stream
- predict the destination of branches

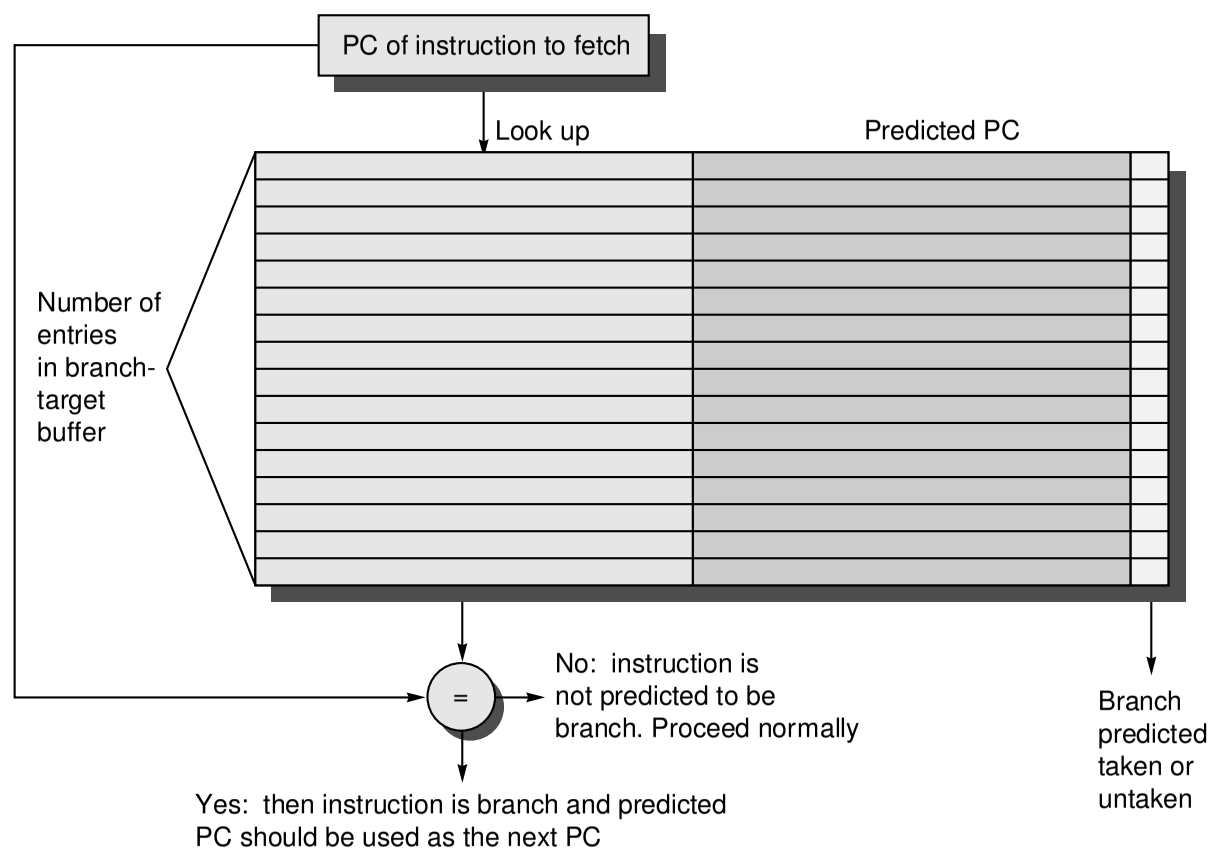

BTB Operation

- use PC (all bits) for lookup
  - match implies this is a branch
- if match and predict bits => taken, set PC to predicted PC
- if branch predict wrong, must recover (same as branch hazards we've already seen)
  - but what about dynamically scheduled processor??
- if decode indicates branch when no BTB match, two choices:
  - look up prediction now and act on it
  - just predict not taken
- when branch resolved, update BTB (at least prediction bits, maybe more)

BTB Performance

- Two things that can go wrong
  - didn't predict the branch (misfetch)
  - mispredicted a branch (mispredict)
- Suppose BTB hit rate of 85% and predict accuracy of 90%, misfetch penalty of 2 cycles and mispredict penalty of 5 cycles, what is average branch penalty?
- Can use both BTB with BPT
  - have no prediction bits in BTB (why is that a good idea?)
  - presence of PC in BTB indicates a lookup in BPT to predict whether the branch will go to destination address in BTB.
- Can store target instructions in BTB

What about indirect jumps/returns?

- BPT does really well with conditional jumps
- BTB does really well with unconditional jumps (jump, jal, etc.)
- Indirect jumps often jump to different destinations, even from the same instruction. Indirect jumps most often used for *return* instructions.
- Return easily handled by a stack.
  - jal -> push PC+4
  - return -> predict jump to address on top of stack

Branch Prediction Key Points

- The better we predict, the behinder we get.
- 2-bit predictors capture tendencies well.
- Correlating predictors improve accuracy, particularly when combined with 2-bit predictors.
- Accurate branch prediction does no good if we don't know there was a branch to predict
- BTB identifies branches in (or before) IF stage.
- BTB combined with branch prediction table identifies branches to predict, and predicts them well.

Now what?

- CPI = 1.0 + BSPI + FPSPI + LdSPI

Branch prediction attacks this

Out-of-order execution, instruction scheduling attack these

Multiple Instruction Issue

or

The insts go marching two by two, hurrah, hurrah...

Getting CPI < 1: Issuing Multiple Instructions/Cycle

- Superscalar
  - variable number of instructions issued each cycle
  - parallelism detected in hardware
  - IBM PowerPC, Sun SuperSparc, DEC Alpha, Pentium, Pentium Pro, ...
- Very Long Instruction Words (VLIW)
  - fixed number of instructions issued each cycle
  - parallelism scheduled by the compiler
  - the next Intel chip (designed primarily by HP)

Getting CPI < 1: Issuing Multiple Instructions/Cycle

- Superscalar DLX: 2 instructions, 1 FP & 1 anything else
  - Fetch 64-bits/clock cycle; Int on left, FP on right
  - Can only issue 2nd instruction if 1st instruction issues

Type	*Pipe Stages*						
Int. instruction	IF	ID	EX	MEM	WB		
FP instruction	IF	ID	EX	MEM	WB		
Int. instruction		IF	ID	EX	MEM	WB	
FP instruction		IF	ID	EX	MEM	WB	
Int. instruction			IF	ID	EX	MEM	WB
FP instruction			IF	ID	EX	MEM	WB

Superscalar DLX Implications

- More ports for FP registers to do FP load & FP op in a pair
- 1 cycle load delay expands to 3 instructions in SS
  - instruction in right half can't use it, nor instructions in next slot
- Branch delay also expands to 3

Unrolled Loop that Minimizes Stalls for Scalar

```
1 Loop: LD    F0,0(R1)
2       LD    F6,-8(R1)
3       LD    F10,-16(R1)
4       LD    F14,-24(R1)
5       ADDD  F4,F0,F2
6       ADDD  F8,F6,F2
7       ADDD  F12,F10,F2
8       ADDD  F16,F14,F2
9       SD    0(R1),F4
10      SD    -8(R1),F8
11      SD    -16(R1),F12
12      SUBI  R1,R1,#32
13      BNEZ  R1,LOOP
14      SD    8(R1),F16    ; 8-32 = -24
```

LD to ADDD: 1 Cycle
ADDD to SD: 2 Cycles

14 clock cycles, or 3.5 per iteration

Loop Unrolling in Superscalar

	Integer instruction	*FP instruction*	*Clock cycle*
Loop:	LD F0,0(R1)		1
	LD F6,-8(R1)		2
	LD F10,-16(R1)	ADDD F4,F0,F2	3
	LD F14,-24(R1)	ADDD F8,F6,F2	4
	LD F18,-32(R1)	ADDD F12,F10,F2	5
	SD 0(R1),F4	ADDD F16,F14,F2	6
	SD -8(R1),F8	ADDD F20,F18,F2	7
	SD -16(R1),F12		8
	SD -24(R1),F16		9
	SUBI R1,R1,#40		10
	BNEZ R1,LOOP		11
	SD -32(R1),F20		12

- Unrolled 5 times to avoid delays (+1 due to SS)
- 12 clocks, or 2.4 clocks per iteration

Dynamic Scheduling in Superscalar

- Dependencies stop instruction issue in In-order SS
- Code compiler for scalar version will run poorly on SS
  - May want code to vary depending on how superscalar
- Simple approach: Combine Tomasulo with the ability to fetch and issue an integer and FP instruction simultaneously
  - simplified if we don't issue instructions that read the same register file in the same cycle.
  - requires multiple CDBs
  - can complicate updating of register bookkeeping if instructions are dependent, but can be done

Performance of Dynamic SS

Iteration no.	*Instructions*	*Issues*	*Executes*	*Writes result*
		clock-cycle number		
1	LD F0,0(R1)	1	2	4
1	ADDD F4,F0,F2	1	5	8
1	SD 0(R1),F4	2	9	
1	SUBI R1,R1,#8	3	4	5
1	BNEZ R1,LOOP	4	5	
2	LD F0,0(R1)	5	6	8
2	ADDD F4,F0,F2	5	9	12
2	SD 0(R1),F4	6	13	
2	SUBI R1,R1,#8	7	8	9
2	BNEZ R1,LOOP	8	9	

≈ 4 clocks per iteration

Branches, Decrements still take 1 clock cycle

Limits of Superscalar

- While Integer/FP split is simple for the HW, get CPI of 0.5 only for programs with:
  - Exactly 50% FP operations
  - No hazards
- If more instructions issue at same time, greater difficulty of decode and issue
  - Even 2-scalar => examine 2 opcodes, 6 register specifiers, & decide if 1 or 2 instructions can issue

Superscalar Key Points

- Only way to get CPI < 1 is multiple instruction issue
- SS requires duplicated hardware, more dependence checking
- Without duplication of functional units, will see limited improvement
- SS combined with dynamic scheduling can be powerful